


# MULTI-TUBE ADSS SINGLE SHEATH CABLE HDPE

36 FIBER G.652D

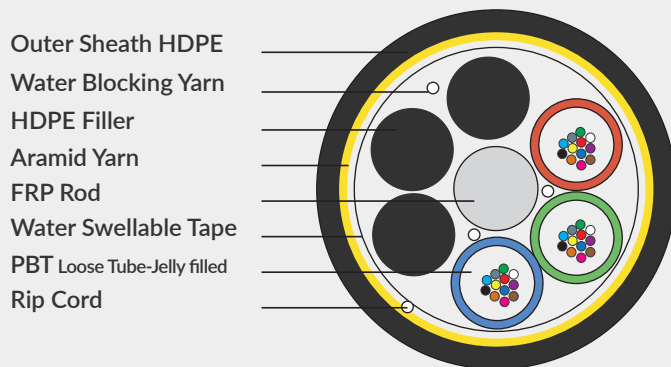

## Features

- Multi Loose Tube
- Unarmoured construction
- Rip cord to open Outer Sheath
- Water Blocking Elements (Tape and Yarn)
- Non metallic cable
- Peripheral Strength Member - Aramid Yarn
- FRP - Central Strength Member 2,5 mm +/- 0,1mm
- PBT Loose Tube filled with Thixotropic Jelly 2,4mm +/- 0,1mm
- Outer Sheath Black HDPE : Thickness - 1,6mm (Min.)
- Inkjet-Print/Hot-foil : MICRO CABLE, NUMBER OF FIBER, FIBER TYPE, PRODUCTION CODE, DRUM NUMBER
- Transport : Plywood / Wooden Drum

## Technical Data/Norms

Standards :	IEC 60794, EIA/TIA, ITU-T, EN 187000, Telecordia GR-20, RUS 1755.900
Operation/Storage :	-40° to +60°C
Installation :	-40° to +60°C
Fiber type :	Singlemode G.652D IEC/ITU standards

Cable Type	Fiber Number	Diameter Ø Nom.	Weight Nom.	Tensile Strength Max	Crush Resistance	Impact Resistance	Min. Bending Radius
MULTITubeADSS HDPE 36F	36	11,5mm (+/-1,0mm)	100 kg/km (+/-10kg)	5000N	2000N/100mm	10Nm	20D