


UNI-TUBE DAC CABLE HDPE

2 FIBER G.657A1

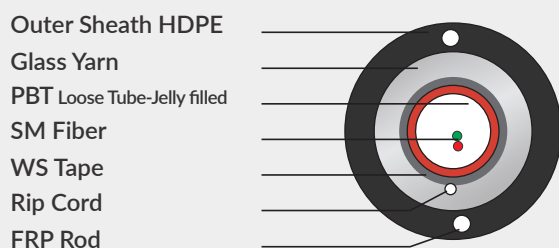

Features

- Single Loose Tube
- DAC Direct Access FTTH Cable
- Small Cable Diameter
- Multiple Network Applications
- Unarmoured construction
- Water Swellable Tape over the Core
- Rip cord to open Outer Sheath
- Glass Yarn as Peripheral Strength Member
- FRP embeded in sheath 2x1,0 mm
- PBT Loose Tube filled with Thixotropic Jelly 1,9 mm +/- 0,1mm
- Non metallic cable
- Outer Sheath Black HDPE : Thickness -1,7 mm (Nom)
- Inkjet-Print/Hot-foil : MICRO CABLE, NUMBER OF FIBER, FIBER TYPE, PRODUCTION CODE, DRUM NUMBER
- Transport : Plywood / Wooden Drum

Technical Data/Norms

Standards :	IEC 60794, EIA/TIA, ITU-T, EN 187000, Telecordia GR-20, RUS 1755.900
Operation/Storage :	-40° to +60°C
Installation :	-40° to +60°C
Fiber type :	Singlemode G.657A1 IEC/ITU standards

Cable Type	Fiber Number	Diameter Ø Nom.	Weight Nom.	Tensile Strength Max	Crush Resistance	Impact Resistance	Min. Bending Radius
Single Tube DAC HDPE 2F	2	6,0mm (+/-0,3mm)	35 kg/km	1500N	2000N/100mm	10Nm	20D